


**HIGH GLOSS**  
COLLECTION

—by Somerset™—



APPALACHIAN OAK FLOORING  
WITH A HIGHER GLOSS FINISH  
WILL MAKE YOUR SPACE SHINE.

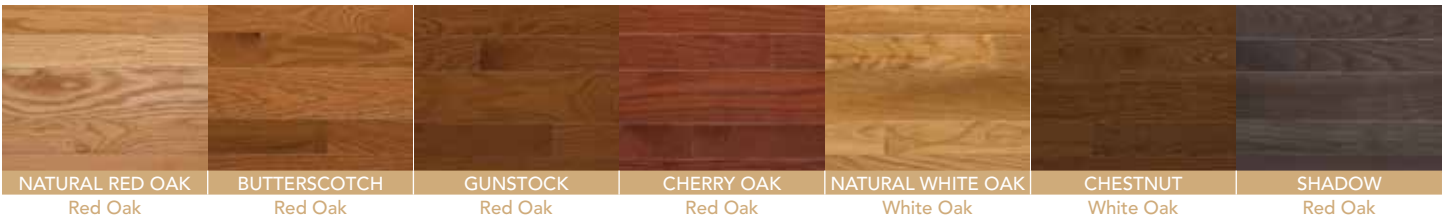

**S SOLID**  
3/4" thick, random lengths up to 6-1/2'  
WIDTHS: 2-1/4", 3-1/4"



PRODUCT SPECIFICATION SHEET

02/14

# HIGH GLOSS: SOLID



Product:	Somerset <b>High Gloss Collection</b> Solid Hardwood Flooring		
Species:	Red Oak or White Oak (Somerset does not mix species.)		
Grade:	Proprietary Somerset grade that meets or exceeds NOFMA Standard and Better.		
Dimensions:	<b>Thickness:</b> 3/4"* <b>Widths:</b> 2-1/4", 3-1/4" <b>Lengths:</b> Random from 10" up to 6-1/2' (conforms to NOFMA Standard and Better specification) <small>*Nominal</small>		
Construction:	Traditional 3/4" solid construction produced from domestically grown and harvested Appalachian hardwood. Material conforms to Appalachian Hardwood Manufacturers, Inc.'s Verified Sustainable Seal ( <a href="http://www.appalachianwood.org">www.appalachianwood.org</a> ). Product is also affiliated with National Oak Flooring Manufacturers Association and the National Wood Flooring Association.		
Profile:	Eased Edge, Square End		
Finish:	Ultimate™ Urethane Finish — UV Cured Aluminum Oxide, Abrasion Resistant Finish		
Colors:	<b>2 1/4" Width</b>	<b>3 1/4" Width</b>	<b>Species</b>
	Natural Red Oak	PS2601HG PS3601HG	Red Oak
	Butterscotch	PS2603HG PS3603HG	Red Oak
	Gunstock	PS2604HG PS3604HG	Red Oak
	Cherry Oak	PS2605HG PS3605HG	Red Oak
	Natural White Oak	PS2606HG PS3606HG	White Oak
	Chestnut	PS2607HG PS3607HG	White Oak
	Shadow	PS2610HG PS3610HG	Red Oak
Gloss Level:	High Gloss		
Janka Hardness:	<b>Species</b>	<b>Lbs</b>	
	Red Oak	1290	
	White Oak	1360	
MSDS:	Not required for cured finish, MSDS for Wood Dust available on request		
Flame Spread:	Class C		
Installation:	Nail down or staple, on or above grade. (NWFA Installation Guidelines and Methods, revised: March, 2007.) Installation guidelines are printed on the bottom of each carton and available at <a href="http://www.somersetfloors.com">www.somersetfloors.com</a>		
Maintenance:	Somerset Ultimate™ Wood Floor Cleaner ( <a href="http://www.somersetfloors.com">www.somersetfloors.com</a> )		
Limited Warranty:	50-Year Finish Wear; Lifetime Structural Integrity ( <a href="http://www.somersetfloors.com">www.somersetfloors.com</a> )		
Molding:	Quarter Round, Stair Nose, Threshold, T-Mold, and Reducer		